TOMAL Feeder 305 EC, Easy Cleanable

The Feeder 305 EC is a multi-screw feeder for safe discharge and accurate metering of solids.

The main advantage of the feeder is that it can easily be dismantled without any tools.

This makes the feeder usable for the food and chemical industry were there is a demand of easy dismantling and cleaning of each individual component.

Feeder 305 EC

Technical data

Type	305 EC
Feeder screws	5 nos. / ø 60 mm
Inlet dimension	300 x 300 mm
Capacity range	5-1500 dm3/h
Drive	Wormgear AC-motor
Material/surface treatment:	AISI 304, blasted with glass pellets. Outlet bearing plate in PVDF.

Components that are easily removed without any tools

- **Outlet funnel**
  easily removed from feeder house.
- **Feeder screws**
  easily taken out from funnel.
- **Drive unit**
  easily removed from screw shaft.

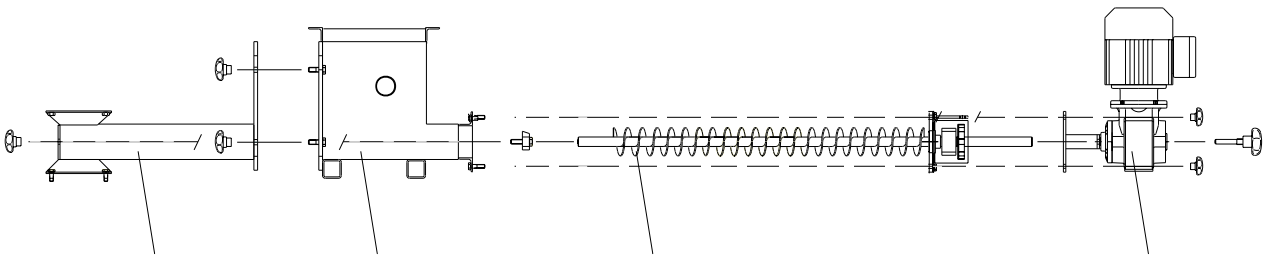

TOMAL AB • S-310 58 Vessigebro
Phone +46 (0)346 - 71 31 00 • Fax +46 (0)346 - 71 31 39 • E-mail: info@tomal.se • www.tomal.se

Hallands Nyheter Civiltryckeri • 005